

4 1/16"  
MMS Category 2  
BOP stack  
Over 3,500 psi  
MASP

3 1/16" stripper CH 36  
Pin Bottom 15 Kpsi  
working pressure (fixed  
to injector head)  
580 lbs. Component Wt.

CH 36 Box x 4 1/16" 15M  
Flange

4 1/16" Bore Quad Stack  
Blind, Shear, Slip, Pipe  
Rams From Top to Bottom  
15 Kpsi Working Pressure  
2,800 lbs. Component Wt.

4 1/16" Bore Flow Cross 2  
1/16" 15M flanged full  
opening plug valves at  
each exit remote control  
outside valve on return  
side 15 Kpsi Working  
Pressure  
375 lbs. Component Wt.

Pipe ram 4 1/16" Bore 15  
Kpsi working pressure  
865 lbs. Component Wt.

4 1/16" Bore 15 Kpsi  
working pressure flanged  
spacer spools if required  
by customer.

4 1/16" Bore 15 Kpsi  
Blind Shear ram  
1600 lbs. Component Wt.

4 1/16" 15 Kpsi manual  
gate valve


Stack mounts to top of  
Tree or X over

Primary Kill Line on  
Quad Port

Kill Line Detail Diagram  
for Quad BOP Kill Port  
2 1/16" 15M flanged full  
opening plug valves.  
Outside valve is Remote

Kill Line Detail Diagram  
for BS BOP Kill Port  
2 1/16" 15M flanged full  
opening plug valves.

The Injector is 8 ft tall. It is  
4' from the top of the slings  
to the injector. It has a base  
which is 4 ft by 4 ft . The  
gosneck has a 72" radius

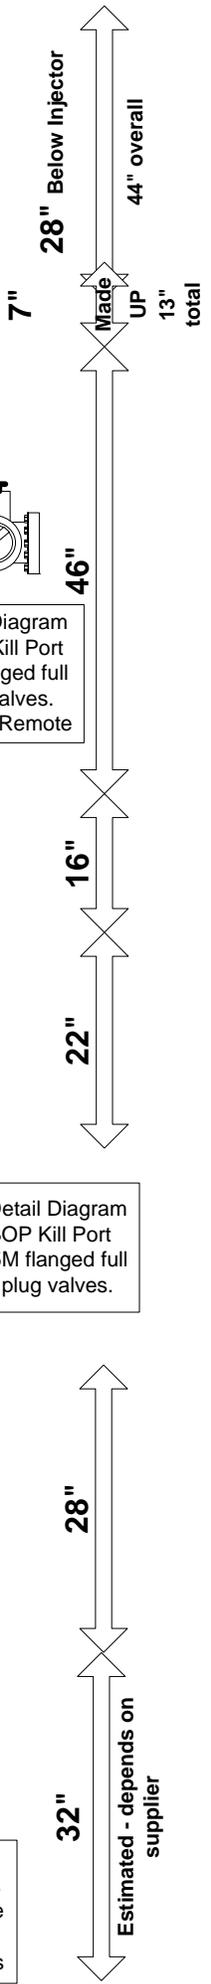

**Coil Tubing Services**  
A Schlumberger Company