



2 9/16" BSEE Category 2 BOP stack 3,500 psi MASP and over


2 9/16" stripper CQ 24 Pin Bottom 10 Kpsi working pressure (fixed to injector head) 300 lbs. Component Wt.




CQ 24 Box x 2 9/16" 10M Flange




2 9/16" Bore Quad Stack Blind, Shear, Slip, Pipe Rams From Top to Bottom 2 1/16" 10M 10 Kpsi Working Pressure 1,500 lbs. Component Wt.




2 9/16" Bore Flow Cross 2 1/16" 10M flanged full opening plug valves at each exit remote control outside valve on choke side 10 Kpsi Working Pressure 350 lbs. Component Wt.




Pipe ram 2 9/16" Bore 10 Kpsi working pressure 450 lbs. Component Wt.




2 9/16" Bore 10 Kpsi working pressure flanged spacer spools if required by customer.




3 1/16" Bore 15 Kpsi flanged Blind Shear ram with crossover to 2 9/16" 10M top. 1600 lbs Component Wt.




3 1/16" Bore Flow Tee 2 1/16" 10M flanged full opening plug valves at one exit other exit blanked off 15 Kpsi Working Pressure 500 lbs. Component Wt.




3 1/16" 15M x 2 9/16" 10 M crossover





2 9/16" 10 Kpsi manual gate valve



Stack mounts to top of Tree or X over

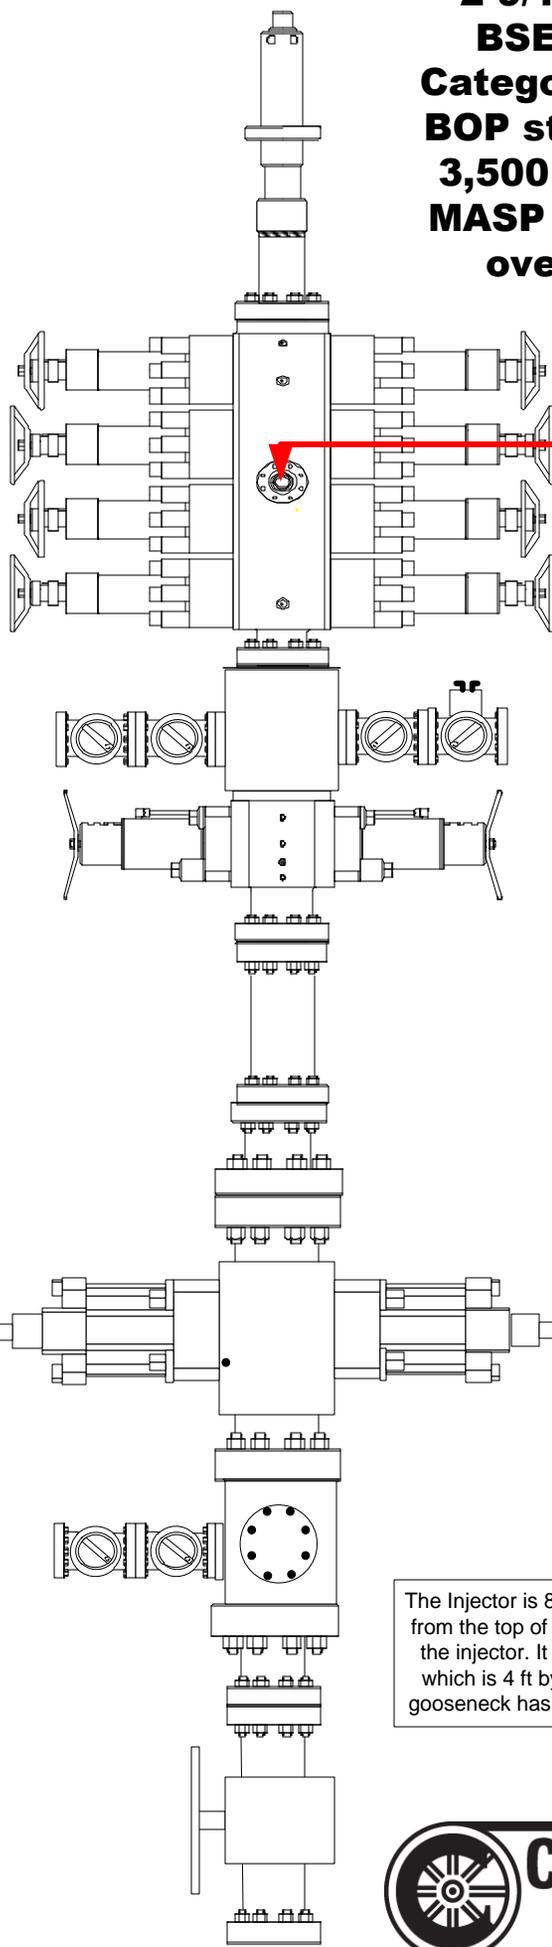

Primary Kill Line on Quad Port



The Injector is 8 ft tall. It is 4' from the top of the slings to the injector. It has a base which is 4 ft by 4 ft . The gooseneck has a 72" radius

